Techno Commercial Proposal
for Machine Tending

Presented to

LG Balakrishnan and Bros
Nagpur Project

Proposed by

Multivista Global Private Limited | Date: 29-Sep-2026



Contacts

Primary Contact	Anandakumar anandakumar@multivistaglobal.com
Technical Contact	Sudharshan B sudharshan.b@multivistaglobal.com
Manager	GANESH KUMAR S ganeshkumar@multivistaglobal.com

Disclaimer

This proposal contains confidential and proprietary, trade secret information of Multivista Global Private Limited and, unless otherwise required by law, shall not be disclosed to any third parties, or used for any purpose other than to evaluate Multivista Global Private Limited's solution & services. The recipient agrees to return the document to Multivista Global Private Limited upon request.

This proposal is made by Multivista Global Private Limited in good faith. However, actual terms governing the performance of services described herein are to be negotiated and finalized in definitive agreements ("Agreements") which will contain essential terms not addressed herein, but which are necessary for the Agreements to become a contract, including without limitation, warranties, representations, conditions precedent, indemnities, and elements of consideration. No contract will exist between our companies regarding the subject matter addressed in this proposal unless and until the Agreements are duly executed on behalf of each company.

Under no circumstances shall either company be liable to the other for any costs or damages of any kind based upon or arising out of not consummating the Agreements envisioned herein. Multivista Global Private Limited retains the right to make changes to this document at any time, without notice. Multivista Global Private Limited makes no warranty for the use of this document and assumes no responsibility for any errors that can appear in the document, nor does it make a commitment to update the information contained herein.

MV Confidential

Document History

Date	Doc. Rev. No	Description	Authors	Reviewed By
25-09-26	DBU/26-27/MH/Machine Tending/R0	Techno Commercial Proposal for Machine Tending	Sudharshan B	Ganesh Kumar S

1. EXECUTIVE SUMMARY

LG Balakrishnan and Bros (LGB) is looking to automate machine tending operations at its Nagpur facility, to reduce manual intervention in loading and unloading components on its JAEWOO CNC machine, and to improve productivity, consistency and operator safety. Based on the requirements discussed, MVGL is pleased to submit this proposal for a Robotic Machine Tending solution.

The proposed solution uses a six-axis collaborative robot, mounted on a pedestal between the infeed and outfeed trays and the CNC machine, to automate the pick-load-unload-place cycle, working in coordination with the machine's cycle-start/cycle-complete signals.

2. REQUIREMENT

Robotic machine tending for the JAEWOO CNC machine as per the below requirements discussed with LGB.

- Automated picking of raw material/blanks from an infeed tray and loading into the CNC machine's chuck/fixture.
- Automated unloading of the finished machined component from the machine and placing it on an outfeed tray, once the machining cycle is complete.
- Robot cycle to be synchronized with the CNC machine's door open/close and cycle-start/cycle-complete signals.
- Compact cell footprint suitable for placement alongside the existing CNC machine at the Nagpur facility.
- Safe operation with interlocks appropriate for a machine tending cell.

MVGL Confidential

3. SOLUTION

Based on the requirements shared by LGB, MVGL proposes the below system:

A six-axis collaborative robot mounted on a dedicated pedestal, positioned between the infeed tray (raw blanks), the outfeed tray (finished components) and the JAEWOO CNC machine. The process flow is described below:

1. Pick Raw Material

The robot picks a raw blank from the infeed tray using the proposed End-of-Arm-Tooling (EOAT).

2. Load to CNC Machine

The robot loads the blank into the CNC machine's chuck/fixture. The machine door is opened/closed and the machining cycle is triggered in coordination with the robot, via a hardwired or PLC-based interface to the machine's controller.

Branch Office
MULTIVISTA GLOBAL PVT. LTD.
1st Floor, Samsons Arcade, No. 22, Andree Road, Shanthi Nagar, Bengaluru, Karnataka 560027, India.
P: +91 44 72005236 | customercare@multivistaglobal.com | +91 44 42003040
servicecare@multivistaglobal.com | www.multivistaglobal.com

3. Wait for Machining Cycle

The robot waits at a safe position while the CNC machine completes its machining cycle, and monitors the machine's cycle-complete signal.


4. Unload Finished Component


On cycle completion, the robot unloads the finished component from the machine and places it on the outfeed tray.

5. Cycle Repeat

The robot returns to pick the next raw blank from the infeed tray, and the cycle repeats until the infeed tray is empty or the batch is complete.

Conceptual Layout

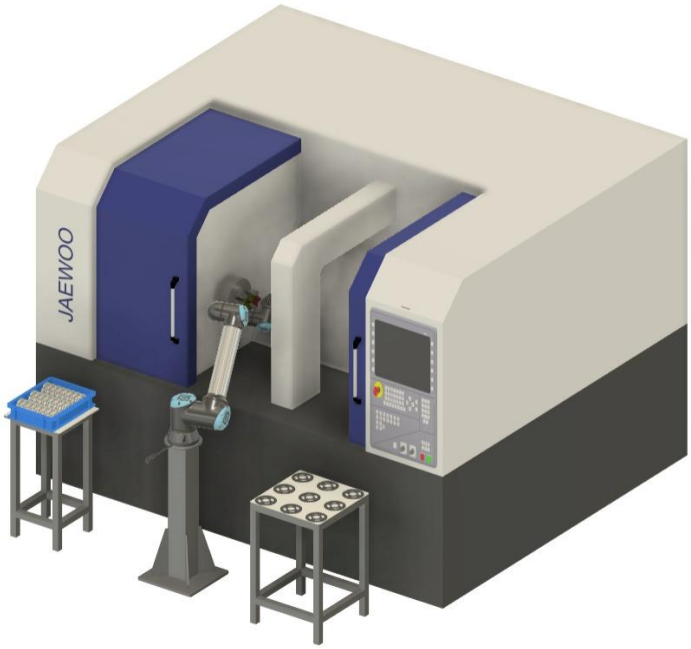

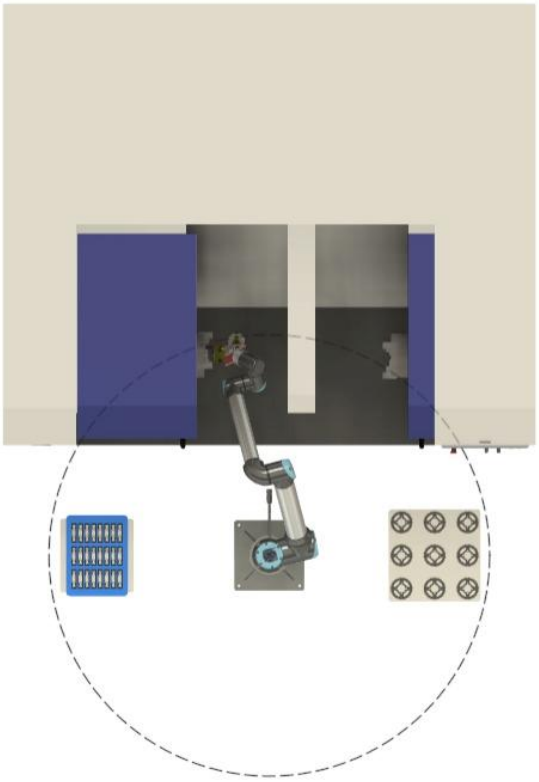

Note: Layout is conceptual and indicative of the robot, pedestal, infeed/outfeed trays and CNC machine arrangement; the final layout, reach and cycle time will be confirmed during detailed engineering based on the actual component drawings and machine interface details.

MVGL Co

4. SCOPE OF WORK / Supply

MVGL Scope of Work / supply

S.No	Description	Make	Qty
1	UR12e Polyscope 5 (Six-Axis Collaborative Robot for Machine Tending)	UR	1 Qty
2	EOAT / Gripper for component handling with pneumatic accessories	Schunk/Zimmer/SMC	1 set
3	Robot cover with dust/coolant protection	Reputed	1 Qty
4	PLC with HMI for Machine Interface I/O Integration with CNC controller	Rockwell/Siemens/Reputed	1 Qty
5	Inputs and outputs pallets & EOAT Finger, pedestal	MVGL	1 Set
6	Installation and Commissioning	MVGL	10 Days

Customer's (LGB) Scope of Work

- Manpower support for civil (grouting) and mechanical work at site (for installation).
- Support for movement of the cell components from the receiving dock to the installation location at the Nagpur facility.
- Required space and layout as per the proposed conceptual layout, alongside the existing JAEWOO CNC machine.
- Power supply and compressed air supply at the workstation location.
- Access to the CNC machine's controller/PLC for the interface integration, and any changes to the machine's program required for automatic cycle operation.

MVGL Confidential

5. PROJECT SCHEDULE

- Delivery of robot and cell components: 10–12 weeks from the date of drawing approval and receipt of advance payment.
- Installation & Commissioning: 10 days considered in the project and beyond these days per man day will be 15,000/- and GST extra. Travel & Accommodation will be Craftsman scope.

6. PRICING SCHEDULE

SL.NO	DESCRIPTION	MAKE	QTY
1	UR12e (Six-Axis Collaborative Robot for Machine Tending)	UR	1 Qty
2	EOAT / Gripper for component handling with pneumatic accessories	Schunk/Zimmer/SMC	1 set
3	Robot cover with dust/coolant protection	Reputed	1 Qty
4	PLC with HMI for Machine Interface- I/O Integration	Rockwell/Siemens /Reputed	1 Set
5	Inputs and outputs pallets & EOAT Finger, pedestal	MVGL	1 Set
6	Installation and Commissioning	MVGL	10 man Days
Total Package Price - 32,60,000/-			

Note: GST @ 18% will be applicable extra once pricing is confirmed.

7. TERMS & CONDITIONS

PRICE	Total price as quoted; Ex-Works Chennai unless otherwise agreed.
SCOPE	Supply as per Scope of Work & Supply (Section 4).
GST	18% extra @ applicable rates.
FREIGHT	At actual or 2% from the total price to the Nagpur site.
TRANSIT INSURANCE	Inclusive.
VALIDITY OF OFFER	30 days.
PAYMENT TERMS	30% advance along with PO and balance against delivery
DELIVERY	Delivery of robot and cell components: 10–12 weeks from the date of drawing approval and receipt of advance payment.
WARRANTY	12 months from the date of invoice.
ORDER PLACEMENT	M/S MULTIVISTA GLOBAL PVT LTD, DOOR No.83/1, THIRUNEERMALAI ROAD, NAGALKENI, CHROMPET, CHENNAI-600044. Tin No: 33020820846, GST NO:

MVGL Confidential

	33AAACM7613G1ZS
Any change in statutory levies will be applicable at the time of supply.	

Note: Payment terms and Ex-Works basis are proposed in line with MVGL's standard commercial terms and are open for discussion during finalization.

8. ABOUT US & PARTNERSHIP

Multivista Global (MVGL):

Multivista Global is a Global Industrial Distribution firm headquartered in Chennai, with over 11+ offices in India and 15+ partnerships with world leaders in Automation such as Rockwell Automation, Universal Robots, Mobile Industrial Robots etc. MVGL serves 3000+ active customers with over 250+ Employees.

Universal Robots (UR):

Universal Robots (UR) is a company that specializes in making collaborative robots, also known as Cobots, which are designed to work alongside humans in a variety of industries.

Universal Robots was founded in 2008 in Odense, Denmark. The company is a subsidiary of the conglomerate Teradyne. UR is known for its innovative approach to robotics, focusing on the development of modular, flexible, and user-friendly robots that can be easily integrated into various industries.

MVGL Confidential